


## TEMPERATURE PROBE TYPE ST07

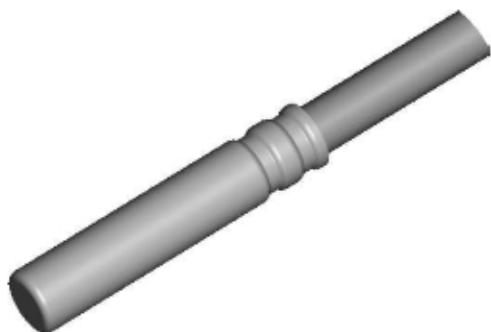

### APPLICATION

These temperature probes are suitable to be used as room and external probes in room temperature adjustment systems or in hot water production appliances for heating and domestic use, such as:

- Floor standing boilers
- Wall hung boilers with hot water tank
- Water heaters
- Convectors

### ELECTRICAL FEATURES

|                       |                     |                                  |
|-----------------------|---------------------|----------------------------------|
| Operating temperature | All except option H | -40°C ÷ +105°C                   |
|                       | Option H            | -30°C ÷ +150°C<br>+200°C for 60" |
| Insulation voltage    | All except option H | 1500 Vac for 1"                  |
|                       | Option H            | 500 Vac for 1"                   |

### ST07 FEATURES with NTC THERMISTOR

| Sensor                  | NTC thermistor (*)                                     |                                 |                                       |
|-------------------------|--------------------------------------------------------|---------------------------------|---------------------------------------|
| Options and peculiarity | Opt.                                                   | Resistive value                 | Coefficiente $\beta$<br>(25°C – 85°C) |
|                         | -                                                      | R 25°C = 10k $\Omega$ $\pm$ 1%  | 3435°K $\pm$ 1%                       |
|                         | Z                                                      | R 25°C = 10k $\Omega$ $\pm$ 1%  | 3977°K $\pm$ 1%                       |
|                         | H                                                      | R 80°C = 1650 $\Omega$ $\pm$ 3% | 3530°K $\pm$ 2%                       |
|                         | (*) Possible versions with different NTC upon request. |                                 |                                       |

### ST07 FEATURES with PTC THERMISTOR

| Sensor                  | PTC thermistor |                                |                                                  |
|-------------------------|----------------|--------------------------------|--------------------------------------------------|
| Options and peculiarity | Opt.<br>K      | Resistive value                | R 25°C = 1k $\Omega$ $\pm$ 1%                    |
|                         |                | Resistance ratio               | $\frac{R_{100^\circ C}}{R_{25^\circ C}} = 1.696$ |
|                         |                |                                | $\frac{R_{-55^\circ C}}{R_{25^\circ C}} = 0.490$ |
|                         |                | Temperature coefficient @ 25°C | $\alpha = 0.79 \text{ } \%/^\circ\text{K}$       |

## PECULIARITY

The sensor is placed in a copper cylindrical body, immersed in an epoxy resin with high thermal conductivity (ST07 probe option H has not epoxy resin) and connected to a bipolar cable enabling to achieve a resistance value.

This value is interpreted differently according to the sensing element.

If thermistor is a NTC the resistance value is inversely proportional to the measured temperature and can be calculated through the following formula:

$$R_T = R_{25} \exp\left[\beta\left(\frac{1}{T} - \frac{1}{T_{25}}\right)\right]$$

where  $R_{25}$  is the resistance value at 25°C,  $T_{25}$  corresponds to (273,15+25)°K and T is the measured temperature, always expressed in Kelvin degrees.

The formula for the probe with option H is as follow:

$$R_T = R_{80} \exp\left[\beta\left(\frac{1}{T} - \frac{1}{T_{80}}\right)\right]$$

where  $R_{80}$  is the resistance value at 80°C,  $T_{80}$  corresponds to (273,15+80)°K e T and T is the measured temperature, always expressed in Kelvin degrees.

Example: calculation of the resistance value of a probe with NTC with  $\beta$  3435 at a temperature of 60°C:

$$R_{60} = 10k \exp\left[3435\left(\frac{1}{(60+273.15)} - \frac{1}{(25+273.15)}\right)\right] = 2981\Omega$$

PTC thermistor has a curve less easily approximated by a mathematical equation than a NTC.

To get the equivalent resistance value at a certain temperature it can use the coefficient  $\alpha$  or the resistance ratio.

Example: calculation of the resistance value at 60 ° C.

Through the formula

$$R_T = R_{25} e^{\alpha(T-T_{25})}$$

we know that  $R_{25}=1000\Omega$  and  $\alpha = 0.79 \%$ ; to calculate the resistance value at 60 ° C:

$$R = 1000 e^{0.0079*(60-25)} = 1319\Omega$$

## OVERALL DIMENSIONS

The following figure 1 shows the probe overall dimensions in mm.

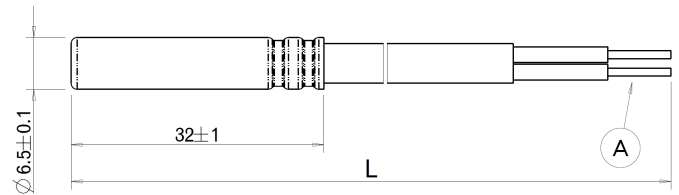


Figure 1

L = length on customer's request.

A = cable finishing can be either skinned, tinned or with a spliced connector 6x0.75mm.

Performing other finishes according to customer requirements. For further information see relevant guide to cable processing.

## PART REFERENCES

### PROBE TEMP. ST07

X<sub>1</sub> X<sub>2</sub> X<sub>3</sub>

→ Length (L) of a finished temperature probe expressed in cm, including copper cylindrical body

→ **No letter:** 2X0,5 PVC 105°C CABLE  
**C:** 2X0,35 SILICONE CABLE

→ **No letter:** NTC 10K B3435

**Z:** NTC 10K B3977

**H:** NTC 10K B3530

**K:** PTC 1K 25°C;  $\alpha = 0.79 \%$  /°K

Example:

### ▪ PROBE TEMPERATURE ST07 Z CM112

#### PROBE TEMP. ST07

**Z**

**CM112**

Probe temperature type ST07

With 10K NTC thermistor having B3977

Cable length 112 cm including copper cylindrical body



## NOTES ABOUT PRODUCT DISPOSAL

The device contains electronic components and cannot therefore be disposed of as normal household waste. For the disposal procedure, please refer to the local rules in force for special waste.

**ATTENTION -> Company Brahma S.p.A. declines any responsibility for any damage resulting from the Customer's interfering with the device**

### BRAHMA S.p.A.

Via del Pontiere, 31

37045 Legnago (VR) - ITALY

Tel. +39 0442 635211 - Fax +39 0442 25683

<http://www.brahma.it>

E-mail: [brahma@brahma.it](mailto:brahma@brahma.it)

27/06/2022 Subject to amendments without notice